

Pressure transmitter for general industrial applications Model A-10

FLUIDIX Datasheet A-10



Applications

- Mechanical engineering
- Machine tools
- Process control & automation
- Hydraulics & Pneumatics
- Pumps & Compressors

Special Features

- Pressure ranges: from 0 ... 15 psi up to 0 ... 10,000 psi
- Non-linearity: $\leq \pm 0.5\%$ BFSL ($\leq \pm 0.25\%$ available)
- Signal output: 4-20 mA, 0-10 V, 0-5 V, others
- Electrical connection: DIN 175301-803 A and C, M12x1, 6 ft. cable, others
- Pressure connection: 1/4 NPT, 1/2 NPT, SAE #4, others available

Description

The Fluidix A-10 pressure transmitter is precision engineered and manufactured to fit many industrial and OEM pressure measurement applications. The rugged design provides resistance to vibration, shock, wide temperature variations, RFI and other extreme environmental conditions that are typical of industrial and OEM applications.

Performance and reliability is enhanced by the all stainless steel welded measuring cell that eliminates the need for soft sealing materials that may deteriorate over time. The state-of-the-art manufacturing and assembly process increases the long term reliability of the A-10.

Primary applications include process control and automation, hydraulics, pneumatics, and machine controls.



A-10 Pressure Transmitters

Specifications

Model A-10

| | | | | | | | | | |
|--|-----------|--|------|----------------------------|-------|-------------------------------|-------|----------------------------------|------|
| Pressure ranges | psi | 15 | 25 | 30 | 50 | 100 | 160 | 200 | 300 |
| Over pressure safety | psi | 30 | 60 | 60 | 100 | 200 | 290 | 400 | 600 |
| Burst pressure | psi | 75 | 150 | 150 | 250 | 500 | 500 | 1500 | 1500 |
| Pressure ranges | psi | 500 | 1000 | 1500 | 2000 | 3000 | 5000 | 10000 | |
| Over pressure safety | psi | 1000 | 1740 | 2900 | 4000 | 6000 | 10000 | 17400 | |
| Burst pressure | psi | 2500 | 7975 | 11600 | 14500 | 17400 | 24650 | 34800 | |
| {Absolute pressure: 0 ... 15 psi up to 0 ... 300 psi}. | | | | | | | | | |
| Vacuum resistance | | Ranges greater then 150 psi | | | | | | | |
| Fatigue life | | 10 million load cycles maximum | | | | | | | |
| Materials | | | | | | | | | |
| ■ Wetted parts | | | | | | | | | |
| » Pressure Connection | | 316 L | | | | | | | |
| » Pressure sensor | | 316 L (as of ≥ 0 ... 150 psig are PH 13-8 ss) | | | | | | | |
| ■ Internal transmission fluid | | Silicone oil (only with pressure ranges up to 0 ... 100 psig and 0 ... 300 psi absolute) | | | | | | | |
| ■ Case | | 316 L | | | | | | | |
| Power supply UB | UB in VDC | 8 ... 30 (14 ... 30 with signal output 0 ... 10 V) | | | | | | | |
| maximum ohmic load RA | | 0 ... 10 V, 3-wire | | $R_A > 10 \text{ k}$ | | | | | |
| | | 0 ... 5 V, 3-wire | | $R_A > 5 \text{ k}$ | | | | | |
| | | 1 ... 5 V, 3-wire | | $R_A > 5 \text{ k}$ | | | | | |
| | | 0.5 ... 4.5 V, 3-wire | | $R_A > 4.5 \text{ k}$ | | | | {Other signal output on request} | |
| Response time | ms | < 4 | | | | | | | |
| Current consumption | mA | Signal current (max. 25) for current output | | | | | | | |
| | | Max. 8 for voltage output signal | | | | | | | |
| Isolation voltage | VDC | 500 ¹⁾ | | | | | | | |
| ¹⁾ For power supply, use a circuit with energy limitation (EN/UL/IEC 61010-1, section 9.3) with the following maximum values for the current: where UB = 30 V (DC): 5 A. Provide a separate switch for the external power supply. Alternative for North America: The connection may also be made to "Class 2 Circuits" or "Class 2 Power Units" according to CEC (Canadian Electrical Code) or NEC (National Electrical Code). | | | | | | | | | |
| Non-linearity | % of span | $\leq \pm 0.5\%$ BFSL according to IEC 61298-2 | | | | | | | |
| | | $\{\leq \pm 0.25 \text{ BFSL}\}$ | | | | | | | |
| Accuracy ²⁾ | % of span | $\leq \pm 1.0$ (with non-linearity 0.5 %) | | | | | | | |
| | | $\{\leq \pm 0.5\}$ (with non-linearity 0.25 %) | | | | | | | |
| | | $\{\leq \pm 0.6\}$ (with non-linearity 0.25 % and with signal output 0 ... 5 V) | | | | | | | |
| ²⁾ Includes non-linearity, hysteresis, zero point and full scale error accordingly to IEC 61298-2 Calibrated in vertical mounting position with pressure connection facing down | | | | | | | | | |
| Zero offset | % of span | $\leq 0.15 \text{ typ.}, \leq 0.4 \text{ max.}$ | | (with non-linearity 0.25%) | | | | | |
| | | $\leq 0.5 \text{ typ.}, \leq 0.8 \text{ max.}$ | | (with non-linearity 0.5%) | | | | | |
| Hysteresis | % of span | ≤ 0.16 | | | | | | | |
| Non-repeatability | % of span | ≤ 0.1 | | | | | | | |
| Long-term drift | % of span | ≤ 0.1 | | | | according to IEC 61298-2 | | | |
| Signal noise | % of span | ≤ 0.3 | | | | | | | |
| Permissible temperature of | | | | | | | | | |
| ■ Medium | | 32 ... +176 °F {-22 ... +185 °F} | | | | 0 ... +80 °C {-20 ... +85 °C} | | | |
| ■ Ambient | | 32 ... +176 °F {-4 ... +176 °F} | | | | 0 ... +80 °C {-20 ... +80 °C} | | | |
| ■ Storage | | -4 ... +176 °F | | | | -20 ... +80 °C | | | |
| Operating temperature range | | 32 ... +176 °F | | | | 0 ... +80 °C | | | |
| Temperature error within operating temperature range | % of span | $\leq 1.0 \text{ typ.}, \leq 2.5 \text{ max.}$ | | | | | | | |

Specifications

Model A-10

| | | |
|---|---------------|---|
| Approvals | | UL, CSA, GOST |
| RoHS-conformity | | Yes |
| CE-conformity | | |
| <ul style="list-style-type: none"> ■ Pressure equipment directive ■ EMC directive | | 97/23/EC 89/336/EEC emission (class B) and immunity according to EN 61 326 |
| Shock resistance | g | 500 according to IEC 60068-2-27 (mechanical shock) |
| Vibration resistance | g | 10 according to IEC 60068-2-6 (vibration under resonance) |
| Wiring protection | | |
| <ul style="list-style-type: none"> ■ Overvoltage protection ■ Short-circuit protection ■ Reverse polarity protection | VDC | 32; 36 with 4 ... 20 mA Sig+ to UB- UB+ to UB- |
| Test reference conditions | | According to IEC 61298-1 |
| <ul style="list-style-type: none"> ■ Relative humidity ■ Temperature ■ Atmospheric Pressure | % % KPa | 45 ... 75 59 ... 77 °F (15 ... 25 °C) 86 ... 106 (25.4...31.3 inhg) |
| Weight | oz. | Approx. 2.8 oz. (80 g) |

() Items in curved brackets are optional extras for additional price.

Dimensions in inches (mm)


Ingress protection IP per IEC 60529. The ingress protection classes specified only apply while the pressure transmitter is connected with female connectors that provide the equivalent ingress protection.

DIN 175301-803 A
L-connector
conductor outer diameter
.24" to .32"
IP 65

DIN 175301-803 C
L-connector
conductor outer diameter
.18" to .24"
IP 65

M 12x1, 4-pin
IP 67


Flying leads,
conductor cross section
.013 in²,
conductor outer diameter
.26",
PUR cable - unshielded,
IP 67

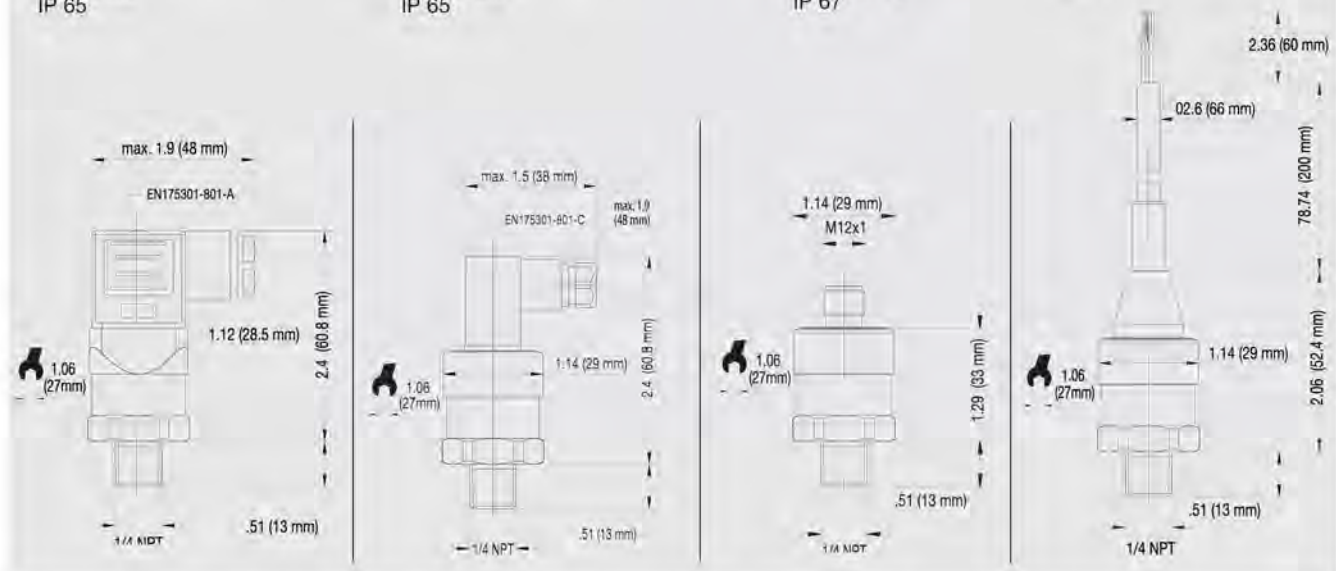


For tapped holes and welding sockets please see Technical Information IN 00.14 for download at www.wika.de

Pressure connections


1/4 NPT



1/2 NPT Male




7/16 - 20 UNF
O-ring boss

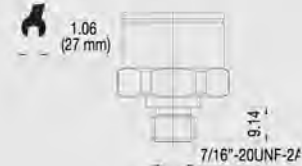


Pressure connections


G 1/2 B



M20 x 1.5
with sealing ring




1/4" NPT female




Electrical connections

DIN 175301-803 A
L-connector



2-wire

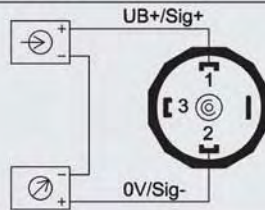



3-wire

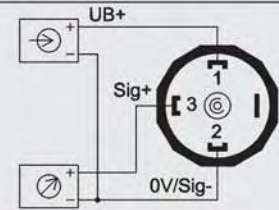




DIN 175301-803 C
L-connector

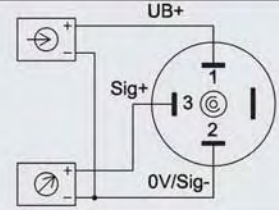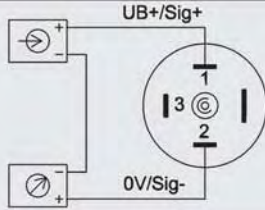

M 12x1, 4-pin
without angle socket or
female cable connectors

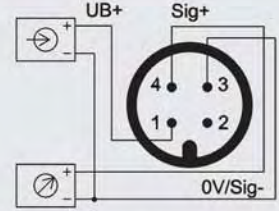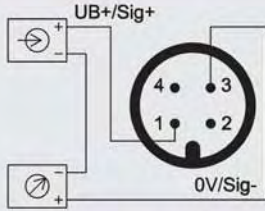

Flying leads

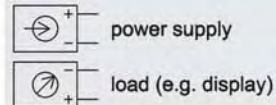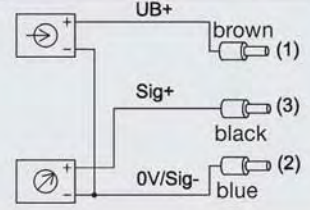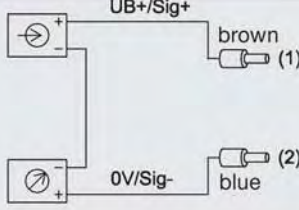

Specifications and dimensions given in this datasheet represent the state of engineering at the time of printing. Modifications may take place and materials specified may be replaced by others without prior notice.



Fluidix, Inc.
1442 Mammoth Rd.
P.O. Box 1807
Mammoth Lakes, CA 93546-1807
Sales: (760) 935-2016
www.fluidixinc.com